

675 Series

1500lbs Electromagnetic Lock

Model **UL675-SL-A (Monitored Version)**

DESCRIPTION

1500lbs EM Locks were designed to meet fire/life safety applications by providing an auxiliary locking mechanism that has no moving parts to bind or wear out for trouble free operation. This will ensure inhibited release at all times where they have become extremely prevalent in applications other than fire/life safety. Suitable for interior & perimeter doors which requires medium security.



FEATURES & SPECIFICATION



Life Safety Applications




Zero Residual Magnetism



Low Energy Consumption



Cost Savings




12/24V Selectable



Ideal for all door types


Models	UL675-SL-A
Features & Spec.	
Lock Status Monitoring	✓
Holding Force	Up to 1500lbs
Magnet Size	266 X 67 X 40 mm
Armature Size	200 X 61 X 16.5 mm
Current Drain	690mA±10%/12Vdc 360mA±10%/24Vdc
Operating Temperature	(-10 to 55)°C (14 to 131)°F
Housing Finishing	Anodized Aluminium Housing
Est. Weight	5.33kg

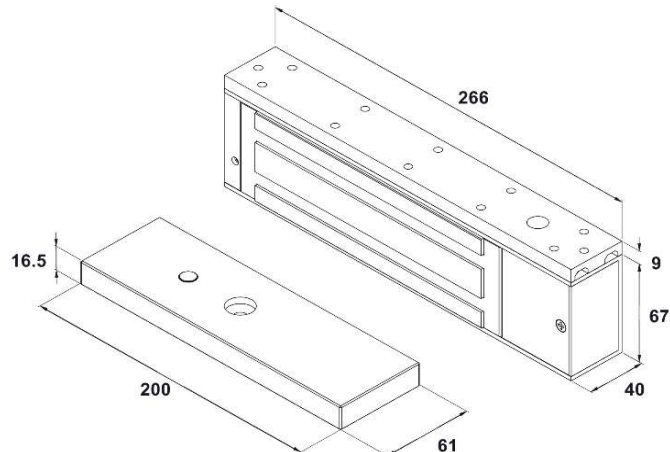


675 Series

1500lbs Electromagnetic Lock

STANDARD INSTALLATION DIAGRAM

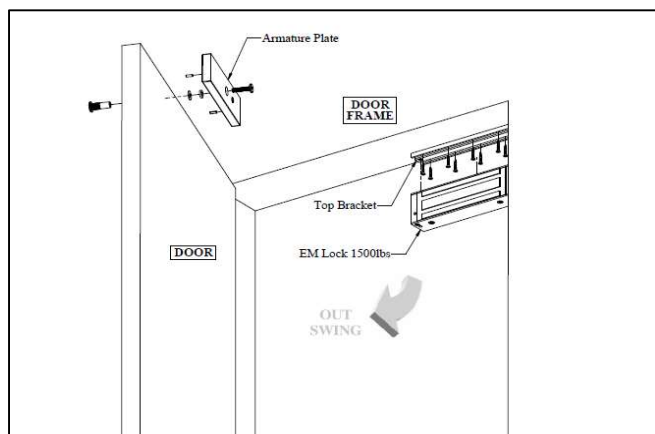


Explode View

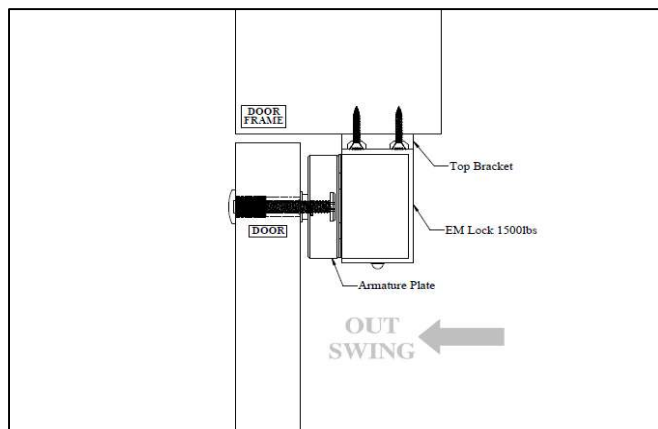

Side View

WIRING DIAGRAM

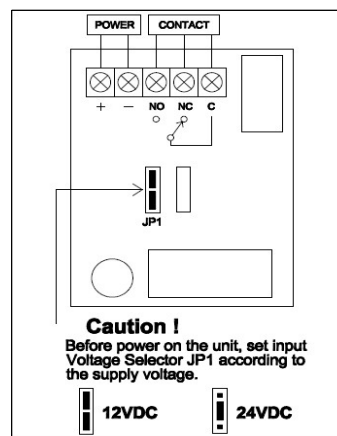

OPTIONAL - BRACKET SELECTION

LS-545	ZLE-545	LSDC-545-G	ZLDC-545-G
--------	---------	------------	------------